






慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD





REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED

UL/CUL 技术参数				cPA [®] UL/CUL Technical Data			
等级	Use Group	B	C	D			
额定电压	Rated Voltage	[V]	300	-	300	-	300
额定电流	Rated Current	[A]	10	-	10	-	10
接线范围	Wire Range	[AWG]	28-12				
单/多芯线	Solid/Stranded	[mm ²]					
耐电压	Withstanding Voltage		1600V/1Min				
IEC 技术参数				IEC61984			
IEC Technical Data							
过电压类别	Overvoltage Category	III	III	II			
污染等级	Contamination Class	3	2	2			
额定电压	Rated Voltage	[V]	320	320	630		
额定电流	Rated Current	[A]	12	12	12		
额定冲击电压	Impulse withstand voltage	[kV]	4.0	4.0	4.0		
导线截面积	Conductor cross section	0.2-2.5					
硬质/柔性导线	Solid/ flexible	[mm ²]					
材料		Material					
绝缘材料	Insulation Material	PA66					
阻燃等级	Inflammability	UL94V-0					
导体材料	Conductor Material	铜合金 Copper alloy					
导体表面镀层	Contactive Coating	镀锡 Sn Plated					
一般参数		Other Data					
间距 Pitch /极数 Poles	[mm]/[P]	5.08/02-24					
剥线长度 Stripping Length	[mm]	7~8					
螺丝 Screw/扭矩 Torque(Max)	[N.m]	-					

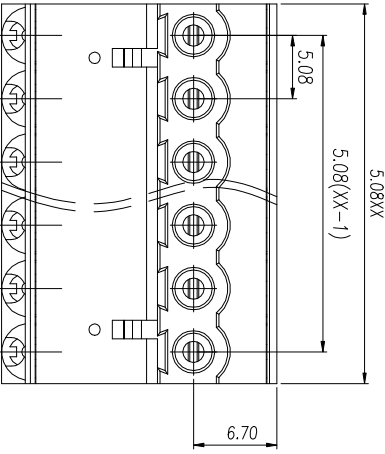

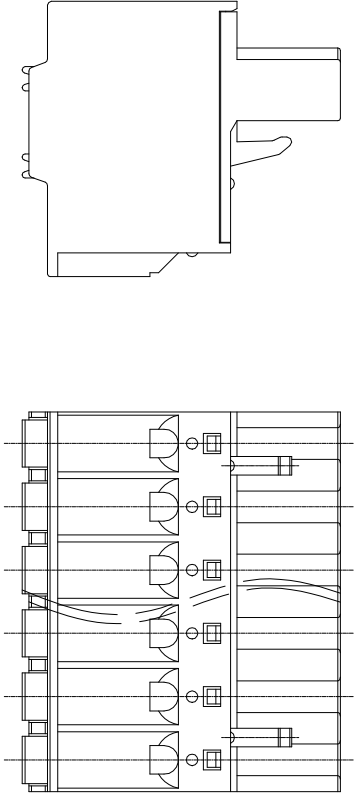
--

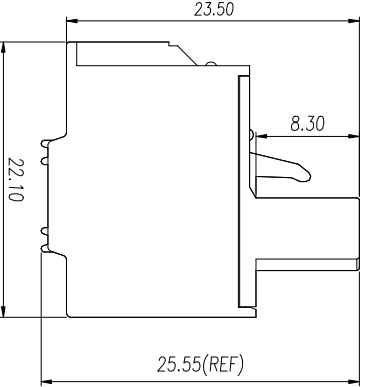

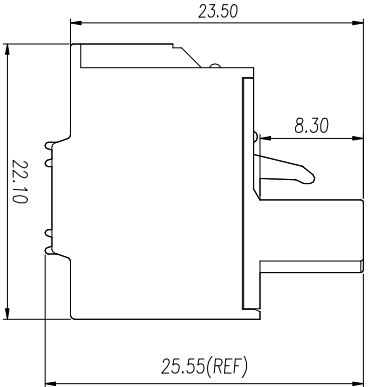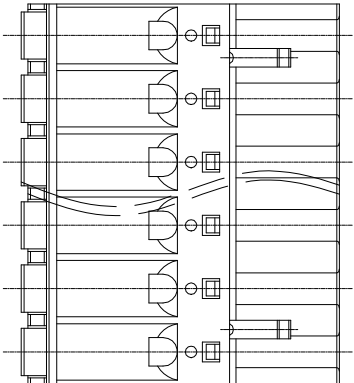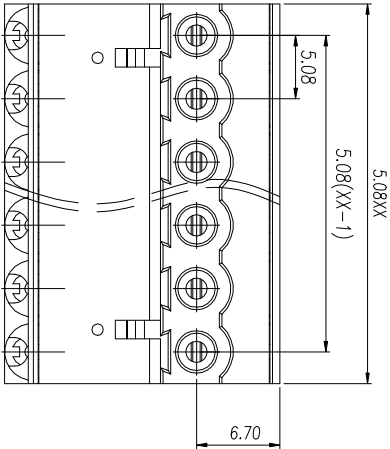

linear dimension(Tolerances Standard GB/T 14486-2008)											
	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	over 250 to 400	over 400 to 630	over 630 to 1000	over 1000 to 1600	over 1600 to 2500
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	±2.00	±2.50	±3.15	±4.00

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	2:1
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					
名称 / TITLE	WJ2EDGKH-5.08-XXP-1YY-00A				
第三视图/THIRD ANGLE PROJECTION				版本 / REV	V0